

NOTES:


1. DISPLAY TYPE: FSTN
2. OPERATING VOLTAGE: 4.8V
3. OPERATING TEMPERATURE: -10°C~60°C
4. STORAGE TEMPERATURE: -20°C~70°C
5. DRIVE MODE: 1/32D, 1/5B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSPARENT, POSITIVE
8. CONNECTOR: COG\ST7533
9. CUSTOMER NO.: FF00369A

FUTURE S&T(SHEN ZHEN)CO.,LCD
 TEL: +86-755-29675886, FAX: +86-755-29675495


DESIGNED BY: *LMC* VERSION: 3.0

CF00132T-13 NO. 1 OF 4

CHECKED BY: UNIT: MM



DATE: 2005-07-27

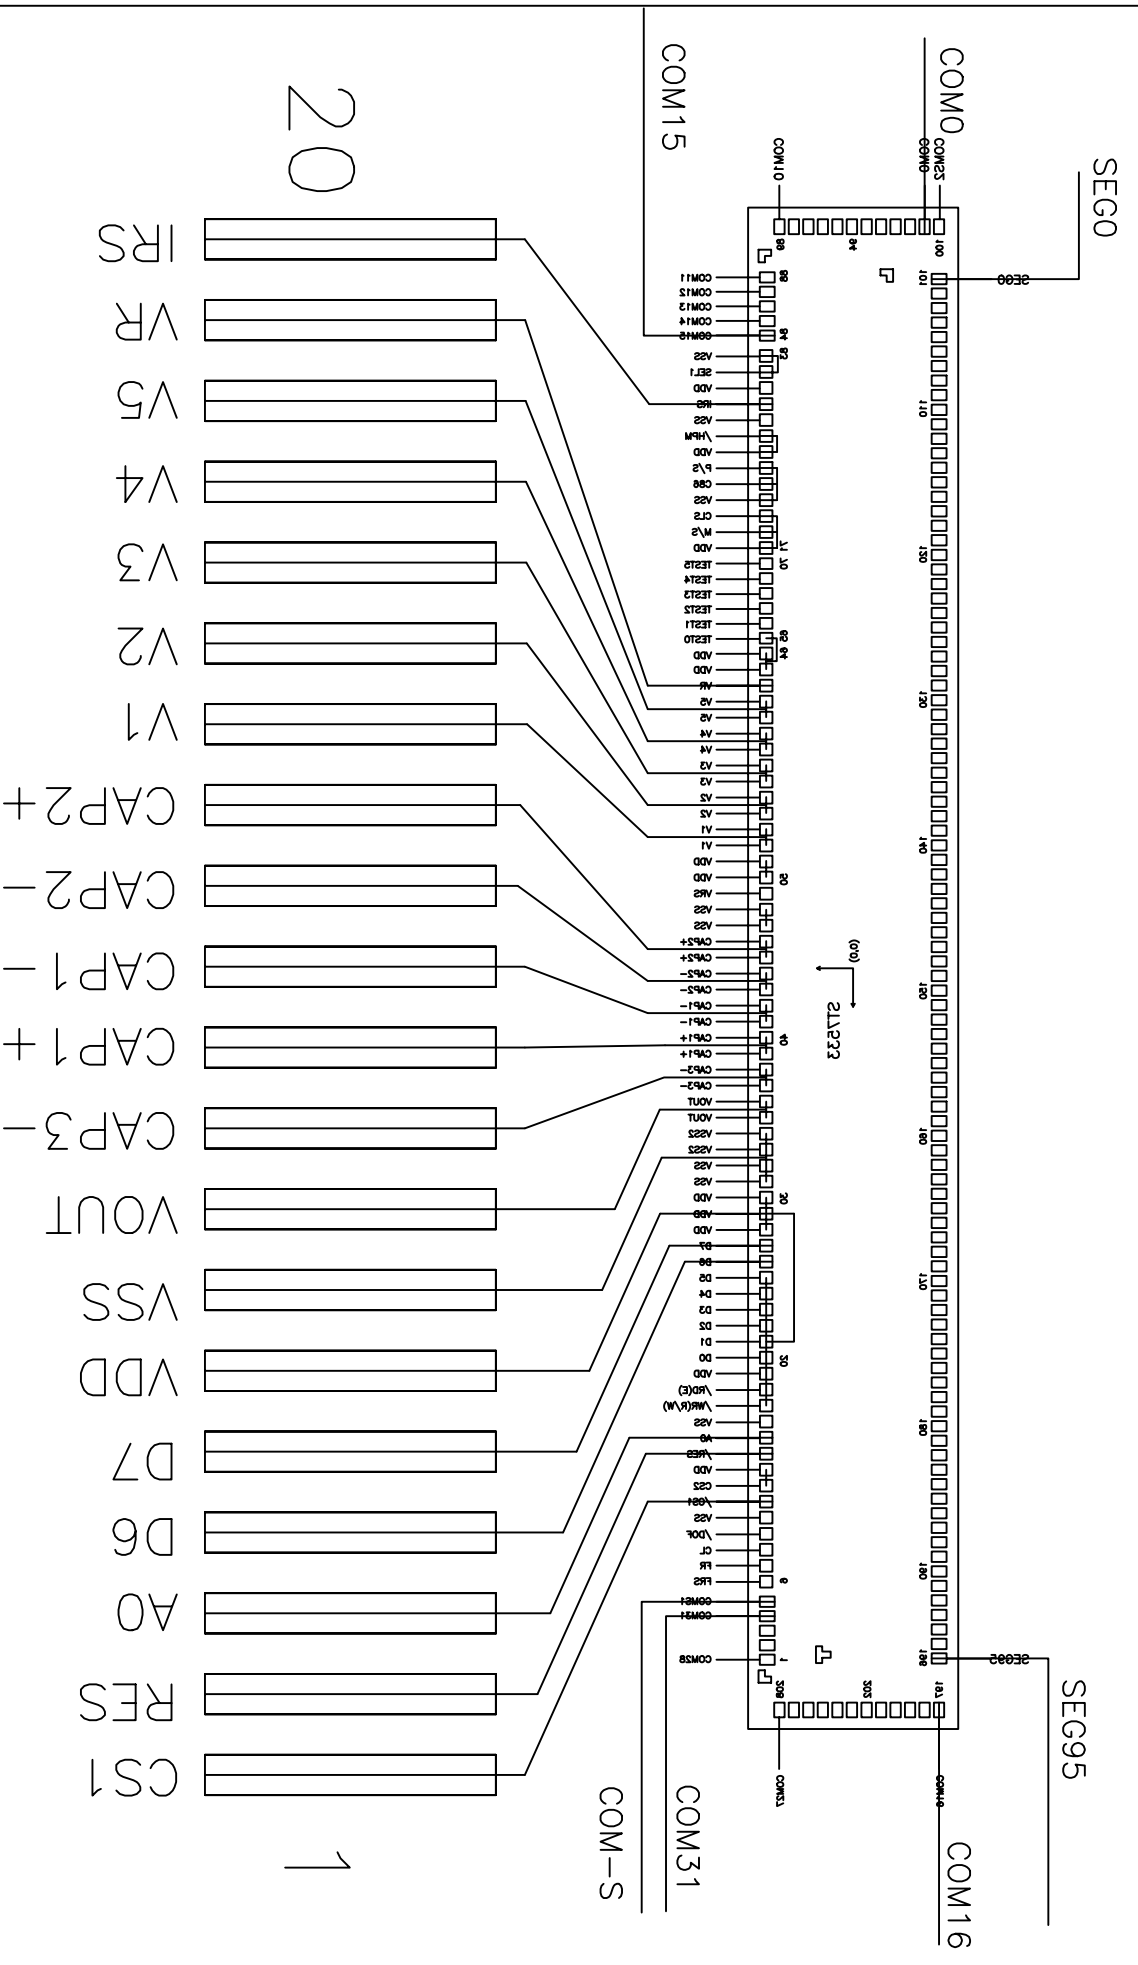

20

1



FUTURE S&T(SHEN ZHEN)CO.,LCD
 TEL: +86-755-29675886, FAX: +86-755-29675495


DESIGNED BY: *Li Q*

CF00132T-13

VERSION: 3.0

NO. 4 OF 4


CHECKED BY:



UNIT: MM

DATE: 2005-07-27

PIN	1	2	3	4	5	6	7	8	9	10
	CS1	RES	A0	D6	D7	VDD	VSS	VOUT	CAP3-CAP1+	
PIN	11	12	13	14	15	16	17	18	19	20
	CAP1-CAP2-	CAP2-CAP2+	CAP2+	V1	V2	V3	V4	V5	VR	IRS

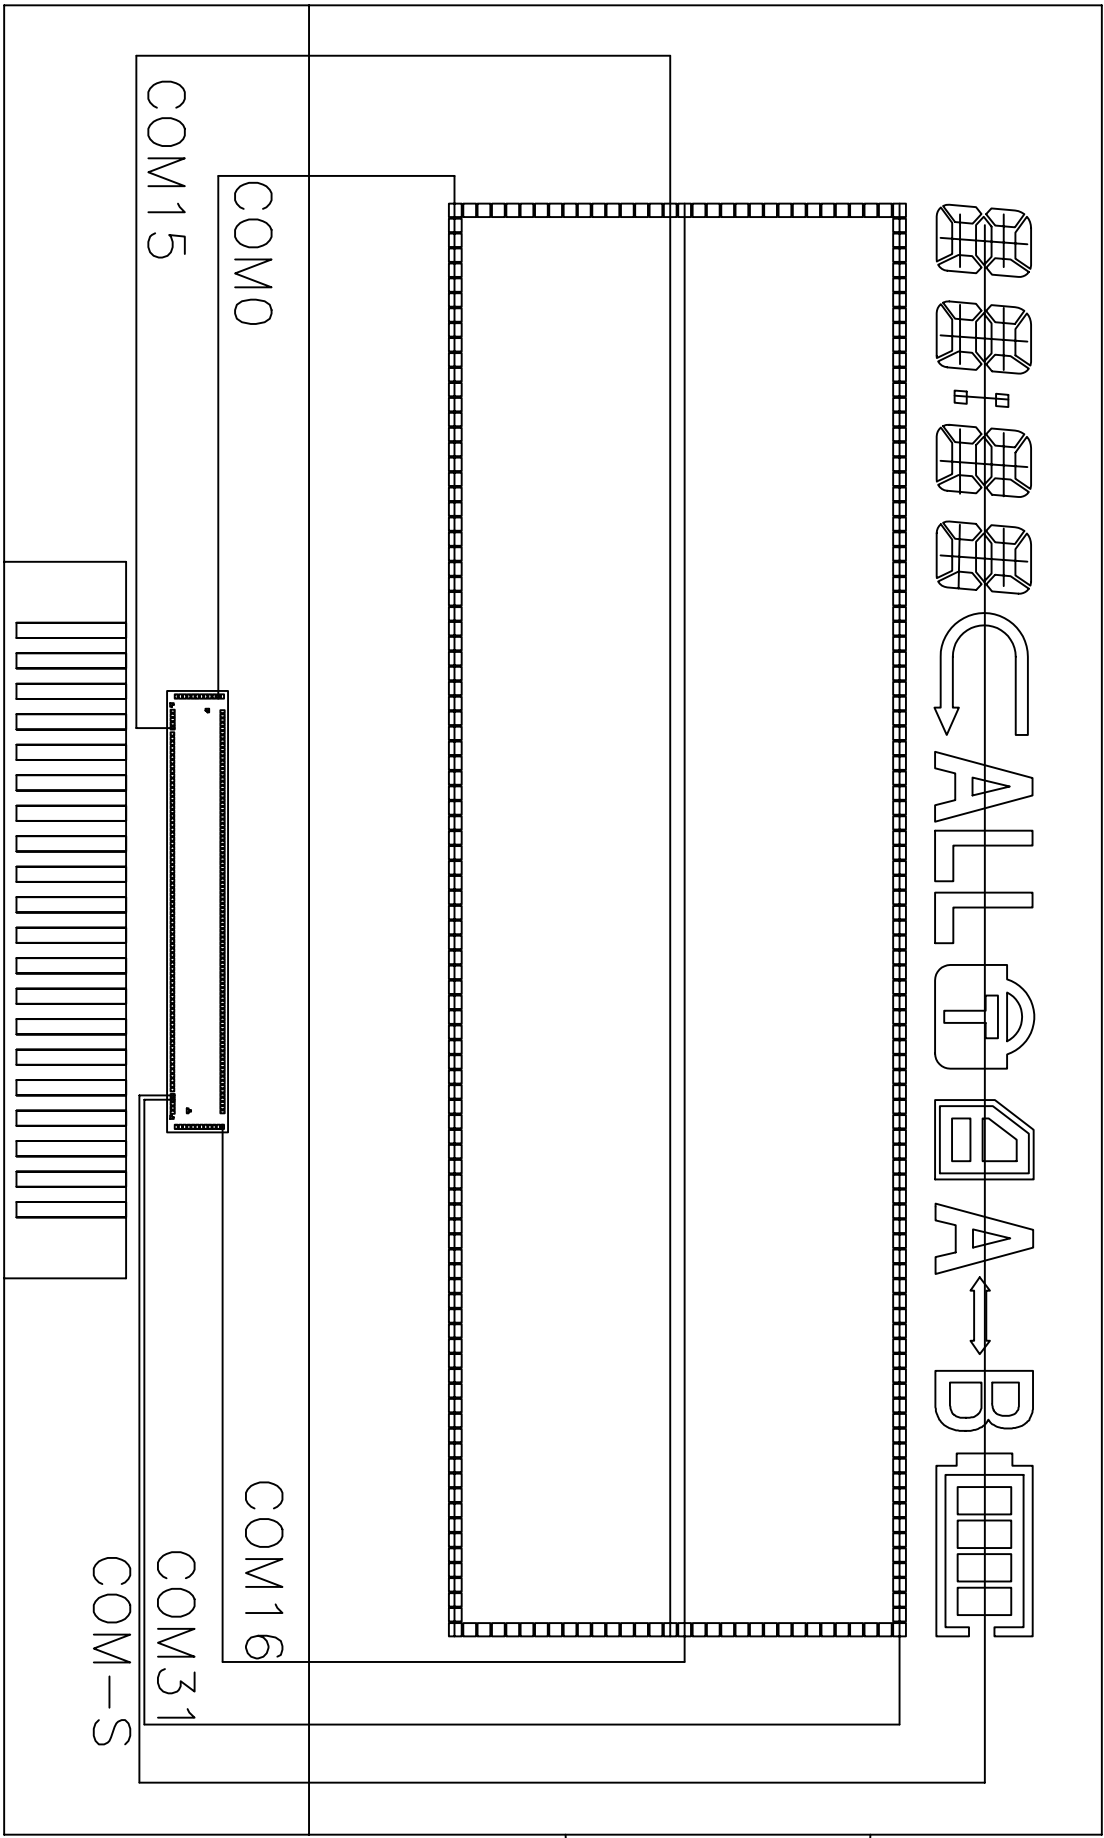

FUTURE S&T(SHEN ZHEN)CO.,LCD
 TEL: +86-755-29675886, FAX: +86-755-29675495

DESIGNED BY:


ZQC

CF00132T-13

VERSION: 3.0

NO. 2 OF 4

CHECKED BY:



UNIT: MM

DATE: 2005-07-27

COMMON