reason

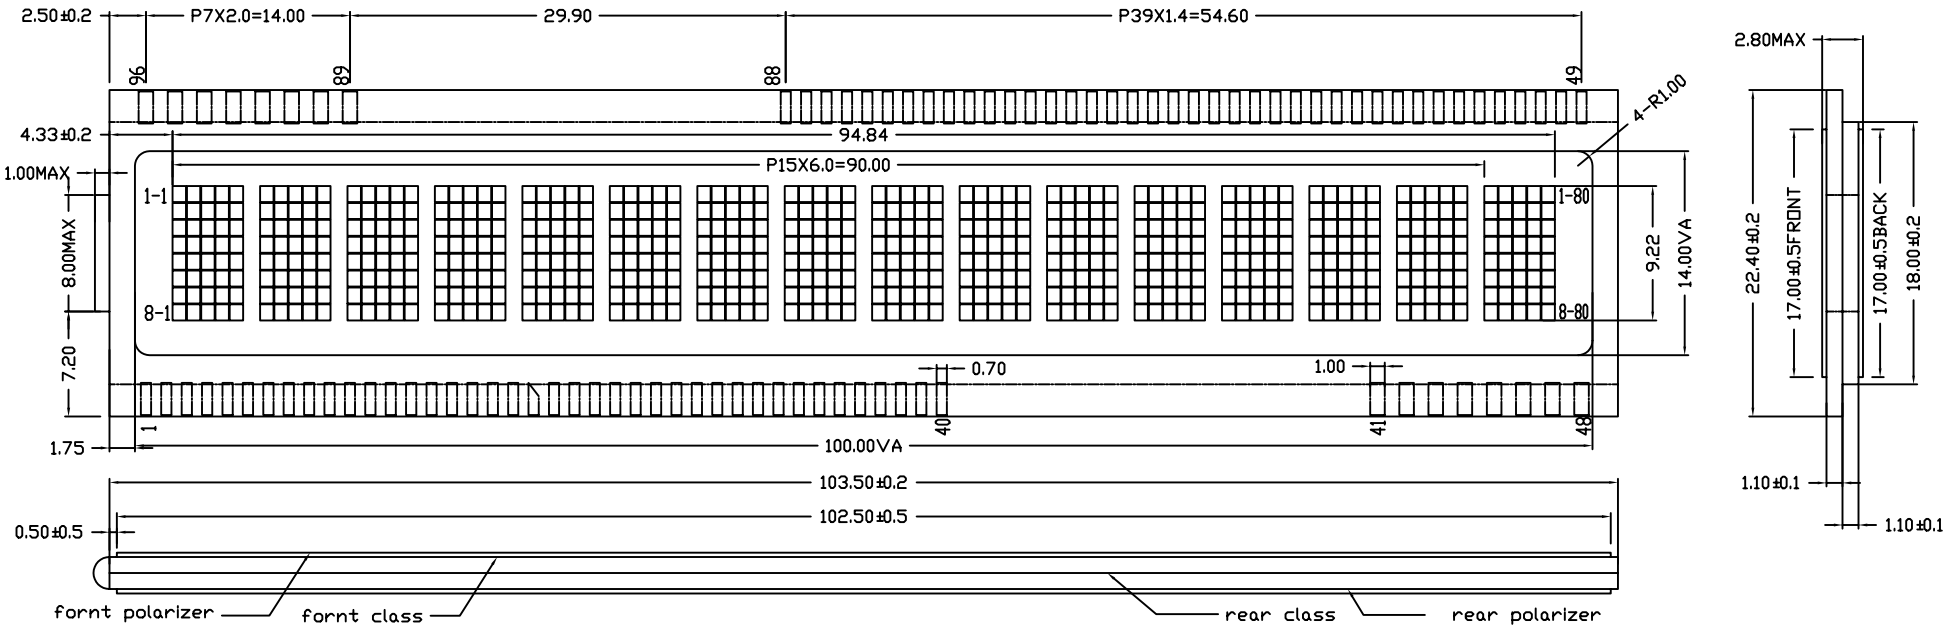

1	2	-----	40	41	42	43	44	45	46	47	48	49	50	-----	88	89	90	91	92	93	94	95	96
1-1	1-2	-----	1-40	-	-	-	-	-	-	-	-	-	-	-----	-	COM1	-	-	-	-	-	-	-
2-1	2-2	-----	2-40	-	-	-	-	-	-	-	-	-	-	-----	-	-	COM2	-	-	-	-	-	-
3-1	3-2	-----	3-40	-	-	-	-	-	-	-	-	-	-	-----	-	-	-	COM3	-	-	-	-	-
4-1	4-2	-----	4-40	-	-	-	-	-	-	-	-	-	-	-----	-	-	-	-	COM4	-	-	-	-
5-1	5-2	-----	5-40	-	-	-	-	-	-	-	-	-	-	-----	-	-	-	-	-	COM5	-	-	-
6-1	6-2	-----	6-40	-	-	-	-	-	-	-	-	-	-	-----	-	-	-	-	-	-	COM6	-	-
7-1	7-2	-----	7-40	-	-	-	-	-	-	-	-	-	-	-----	-	-	-	-	-	-	-	COM7	-
8-1	8-2	-----	8-40	-	-	-	-	-	-	-	-	-	-	-----	-	-	-	-	-	-	-	-	COM8
-	-	-----	-	-	-	-	-	-	-	-	COM9	1-80	1-79	-----	1-41	-	-	-	-	-	-	-	-
-	-	-----	-	-	-	-	-	-	-	COM10	-	2-80	2-79	-----	2-41	-	-	-	-	-	-	-	-
-	-	-----	-	-	-	-	-	-	COM11	-	-	3-80	3-79	-----	3-41	-	-	-	-	-	-	-	-
-	-	-----	-	-	-	-	-	COM12	-	-	-	4-80	4-79	-----	4-41	-	-	-	-	-	-	-	-
-	-	-----	-	-	-	-	COM13	-	-	-	-	5-80	5-79	-----	5-41	-	-	-	-	-	-	-	-
-	-	-----	-	-	-	COM14	-	-	-	-	-	6-80	6-79	-----	6-41	-	-	-	-	-	-	-	-
-	-	-----	-	-	COM15	-	-	-	-	-	-	7-80	7-79	-----	7-41	-	-	-	-	-	-	-	-
-	-	-----	-	COM16	-	-	-	-	-	-	-	8-80	8-79	-----	8-41	-	-	-	-	-	-	-	-

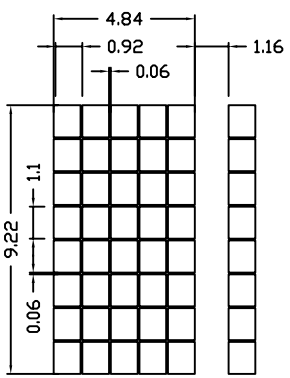

SCALE 2:1

NOTES:

1. DISPLAY TYPE: STN(Y-G)
2. LCD OPERATING VOLTAGE: 4.4V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/16D,1/4B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSFLECTIVE,POSITIVE
8. CONNECTOR: ZEBRA
9. CUSTOMER NO: HS6629

FUTURE S&T(SHEN ZHEN)CO.,LCD
TEL: +86-755-29675886, FAX: +86-755-29675495

DESIGNED BY: FUJB	Y00010T-11	VERSION: 1.0
		NO. 1 OF 1
CHECKED BY:		UNIT: MM
		DATE: 2005-06-16