
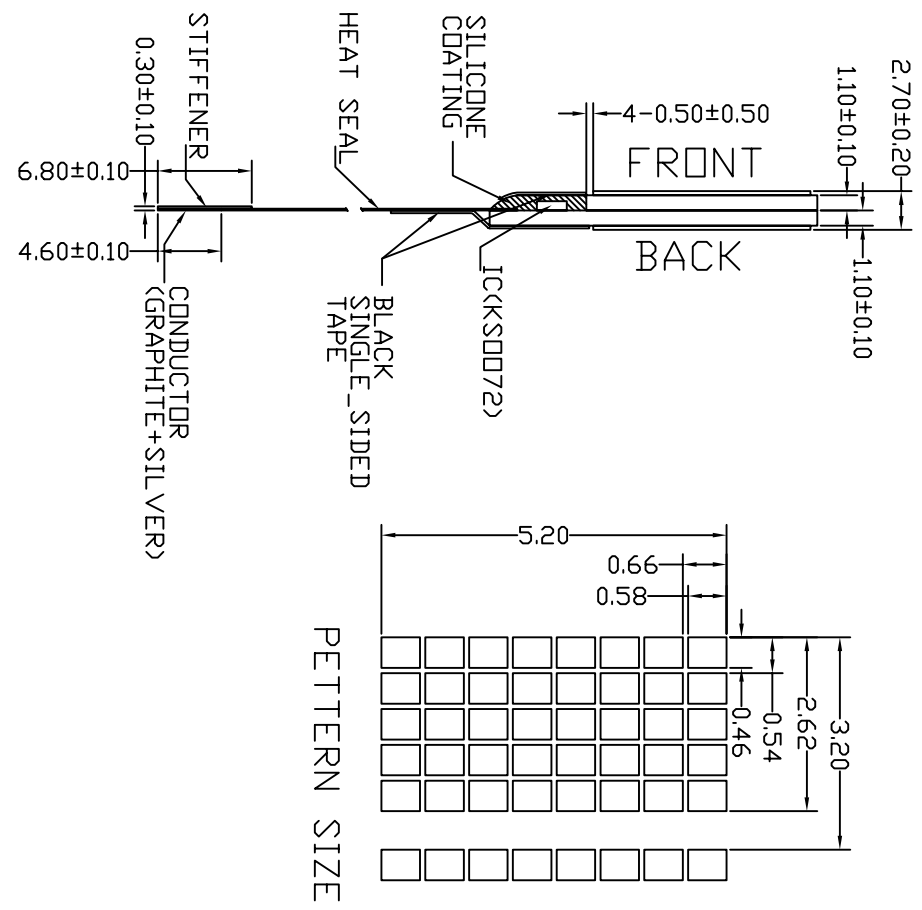


Customer:

Customer NO.:

Customer Approve By:

REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1'ST DESIGN(FG01151R)	LHP	2006.04.19

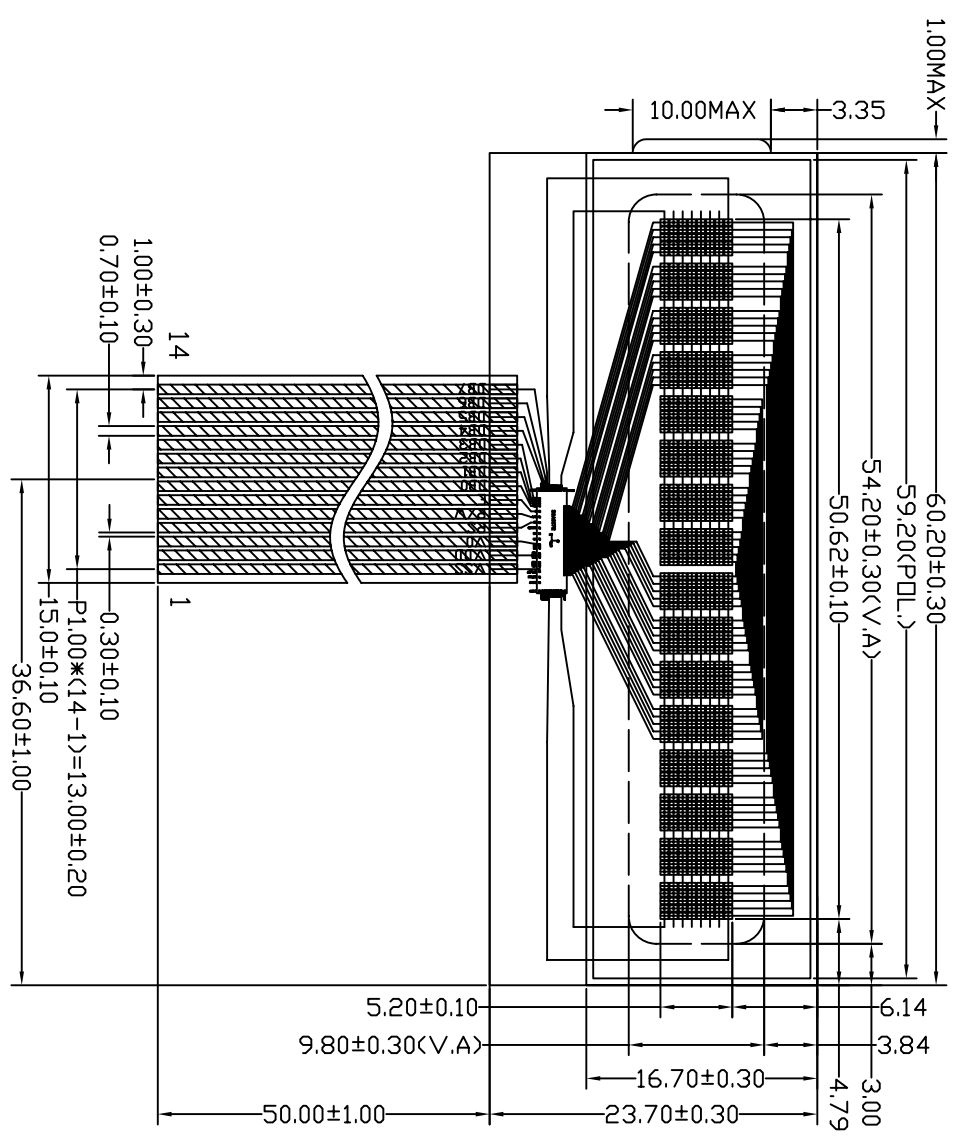

PIN#	1	2	3	4	5	6	7
DES.	VSS	VDD	V0	RS	R/W	E	DB0
PIN#	8	9	10	11	12	13	14
DES.	DB1	DB2	DB3	DB4	DB5	DB6	DB7

NOTE:

- 1.DISPLAY TYPE: TN POSITIVE
- 2.LCD POLARIZER TYPE: REFLECTIVE GREY
- 3.VIEWING DIRECTION: 6.00 0'CLOCK
- 4.VOP: 4.25V @25°
- 5.DRIVE METHOD: 1/16DUTY,1/5BIAS
- 6.OPERATING TEMP: 0°C ~ +50°C
- 7.CONNECTOR: STORAGE TEMP: -20°C ~ +70°C
- 8.DISPLAY DRIVER: HEAT SEAL S6A0072

飞优特科技(深圳)有限公司
FUTURE S&T(SHEN ZHEN)CO.,LTD
 TEL: +86-755-29675886, FAX: +86-755-29675495
 E-mail: futurelcd@21cn.com

LCM NO.: FG16101-TANN DWG NO.: G16101-TANN-CD
 DRAWN BY: CHECKED BY: APPROVED BY:

UNIT: MM SIZE: A4
 SHEET: 1 OF 4