
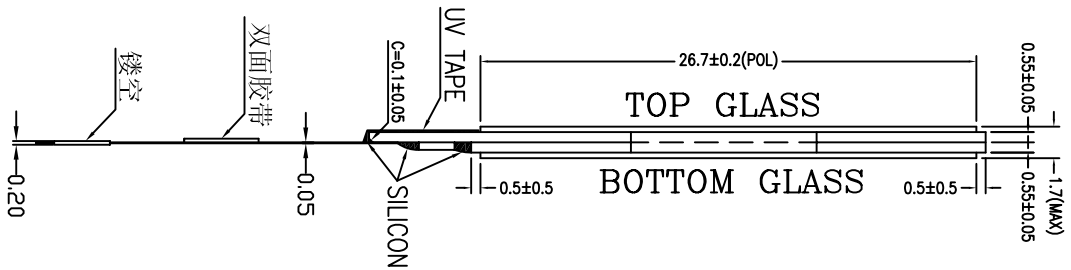


Customer:


Customer NO.:

Customer Approve By:

REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1'ST DESIGN(CF02069T)	LHP	2006.10.10

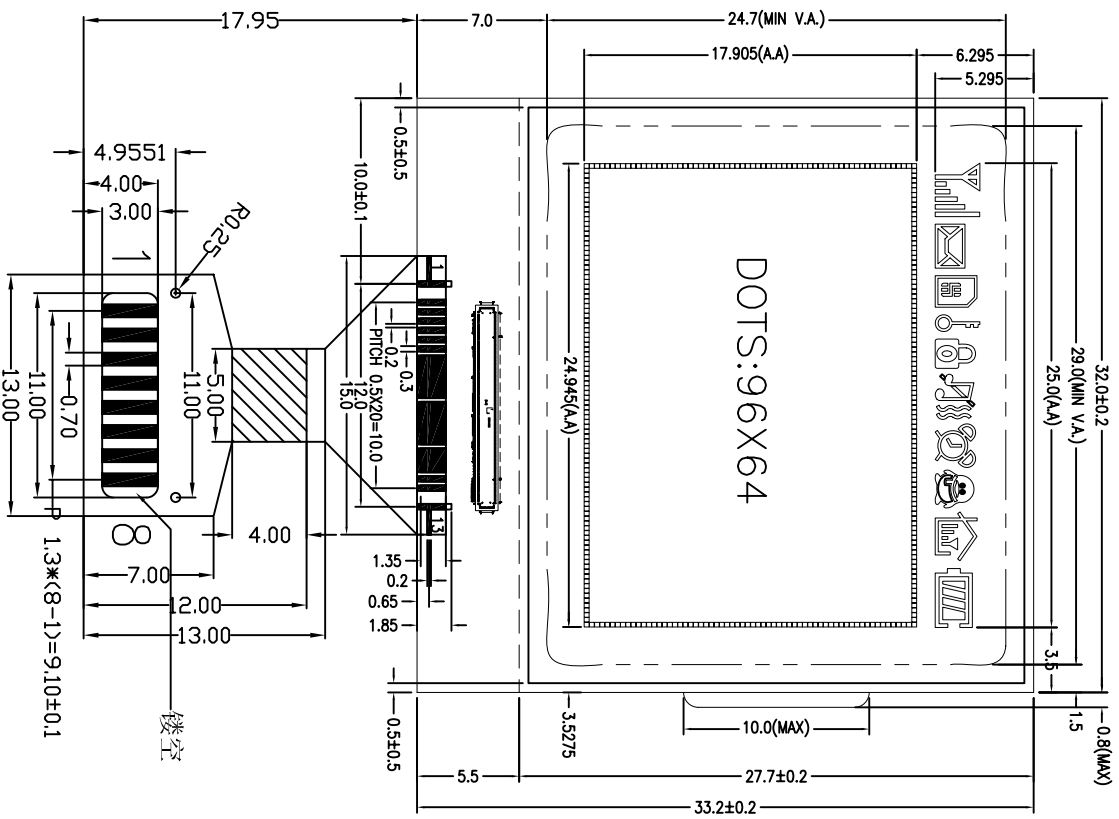

Pin No	Symbol
1	CS1
2	RES
3	D/C
4	SCK
5	SDA
6	VDD
7	VSS
8	VOUT



NOTE:

- 1.DISPLAY TYPE: FSTN POSITIVE
- 2.LCD POLARIZER TYPE: TRANSFLECTIVE
- 3.VIEWING DIRECTION: 6.00 O'CLOCK
- 4.OPERATING VOLTAGE: Vdd=3.3V Vlcd=8.1 V
- 5.DRIVE METHOD: 1/65DUTY,1/9BIAS
- 6.OPERATING TEMP: -20 ~ +70°C
- 7.LCD CONNECTOR: STORAGE TEMP: -30 ~ +80°C
- 8.DISPLAY DRIVER: COG SSD1805Z

飞优特科技(深圳)有限公司
FUTURE S&T(SHEN ZHEN)CO.,LTD
 TEL: +86-755-29675886, FAX: +86-755-29675495
 E-mail: futureled@21cn.com

LCM NO.: FG966401-FGNN DWG NO.: G966401-FGNN-CD
 DRAWN BY: CHECKED BY: APPROVED BY:

UNIT: MM SHEET: 1 OF 4 SIZE: A4 REV: A0