

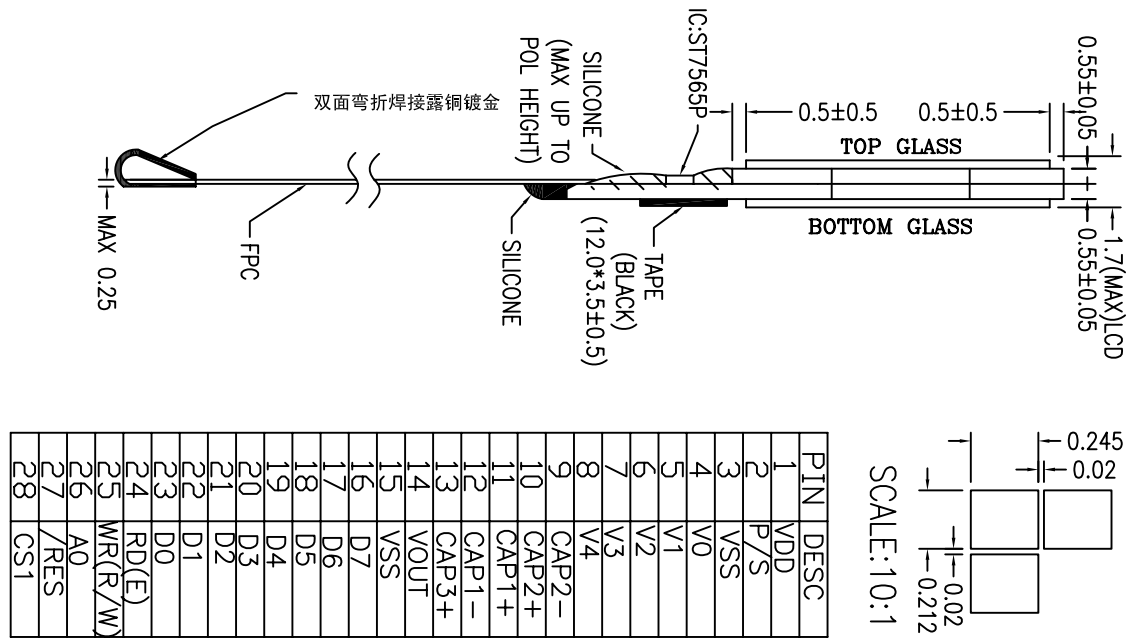


Customer:

Customer NO.:

Customer Approve By:

REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1 ST DESIGN (FG01399T)	LHP	2006.05.05

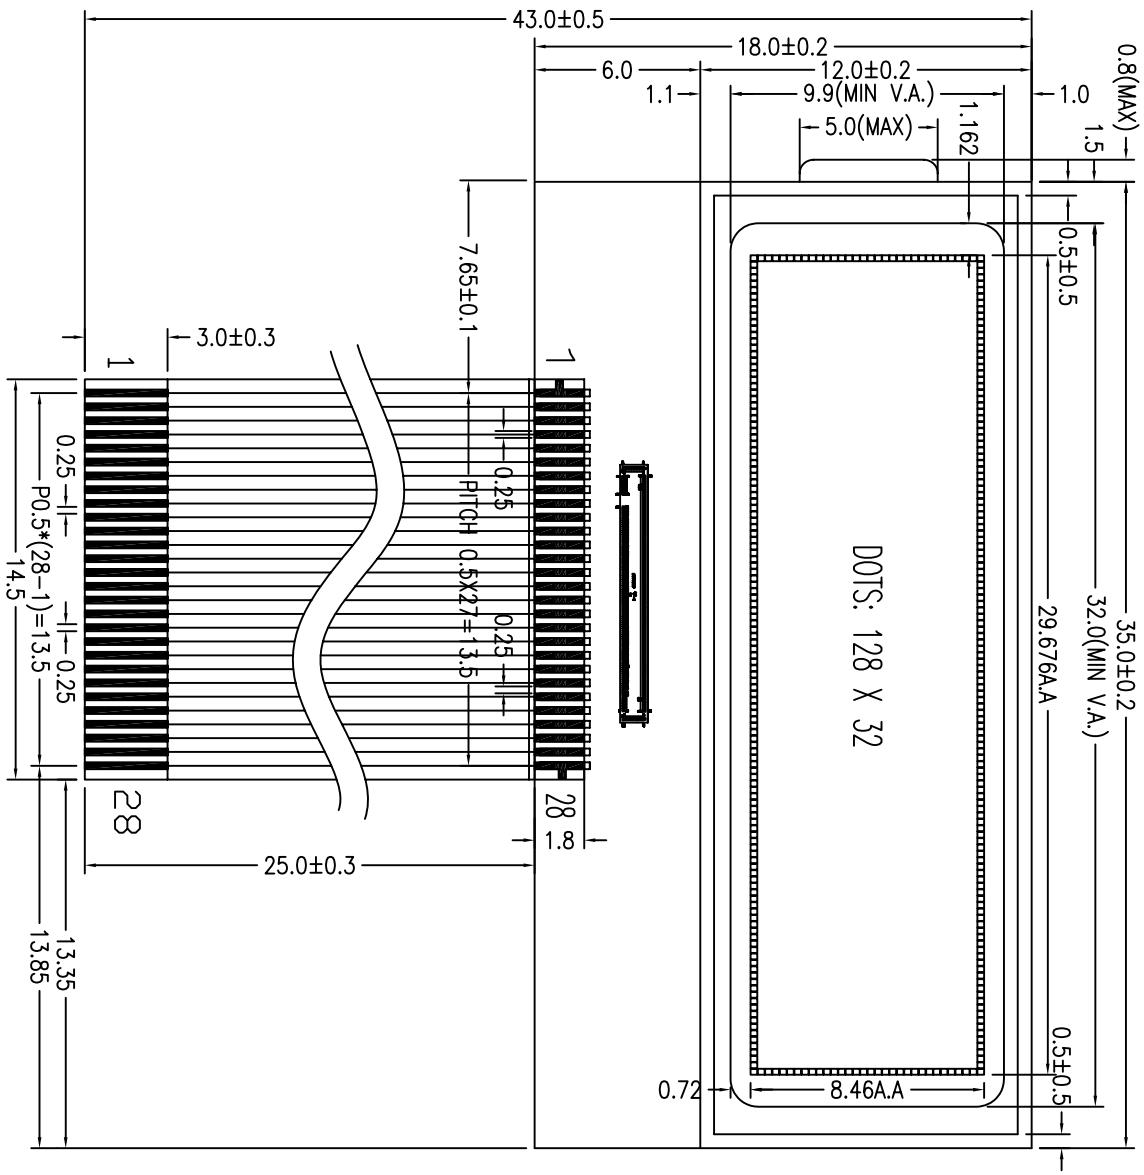

SCALE:10:1

PIN	DESC
1	VDD
2	P/S
3	VSS
4	V0
5	V1
6	V2
7	V3
8	V4
9	CAP2-
10	CAP2+
11	CAP1+
12	CAP1-
13	CAP3+
14	VOUT
15	VSS
16	D7
17	D6
18	D5
19	D4
20	D3
21	D2
22	D1
23	D0
24	RD(E)
25	WR(R/W)
26	A0
27	/RES
28	CS1

NOTE:

- 1.DISPLAY TYPE:
- 2.LCD POLARIZER TYPE:
- 3.VIEWING DIRECTION:
- 4.LCD OPERATING VOLTAGE:
- 5.DRIVE METHOD:
- 6.OPERATING TEMP:
- 7.LCD CONNECTOR:
- 8.DISPLAY DRIVER:

FSTN POSITIVE MODE.

TRANSFLECTIVE (P3)

6.00 O'CLOCK

3.0 ±0.2V Vop=6.1V

1/33DUTY,1/6BIAS

-10 ~ +60°C

-20 ~ +70°C

COG/FPC

ST7565P

飞优特科技(深圳)有限公司
FUTURE S&T(SHEN ZHEN)CO.,LTD

TEL: +86-755-29675886, FAX: +86-755-29675495
 E-mail: futureled@21cn.com

CD

UNIT: MM SIZE: A4

SHEET: 1 OF 1

LCM NO.: FG1283201-FENN DWG NO.: G1283201-FENN-CD

REV: A0

DRAWN BY:

CHECKED BY:

APPROVED BY: